


Variety Accessories

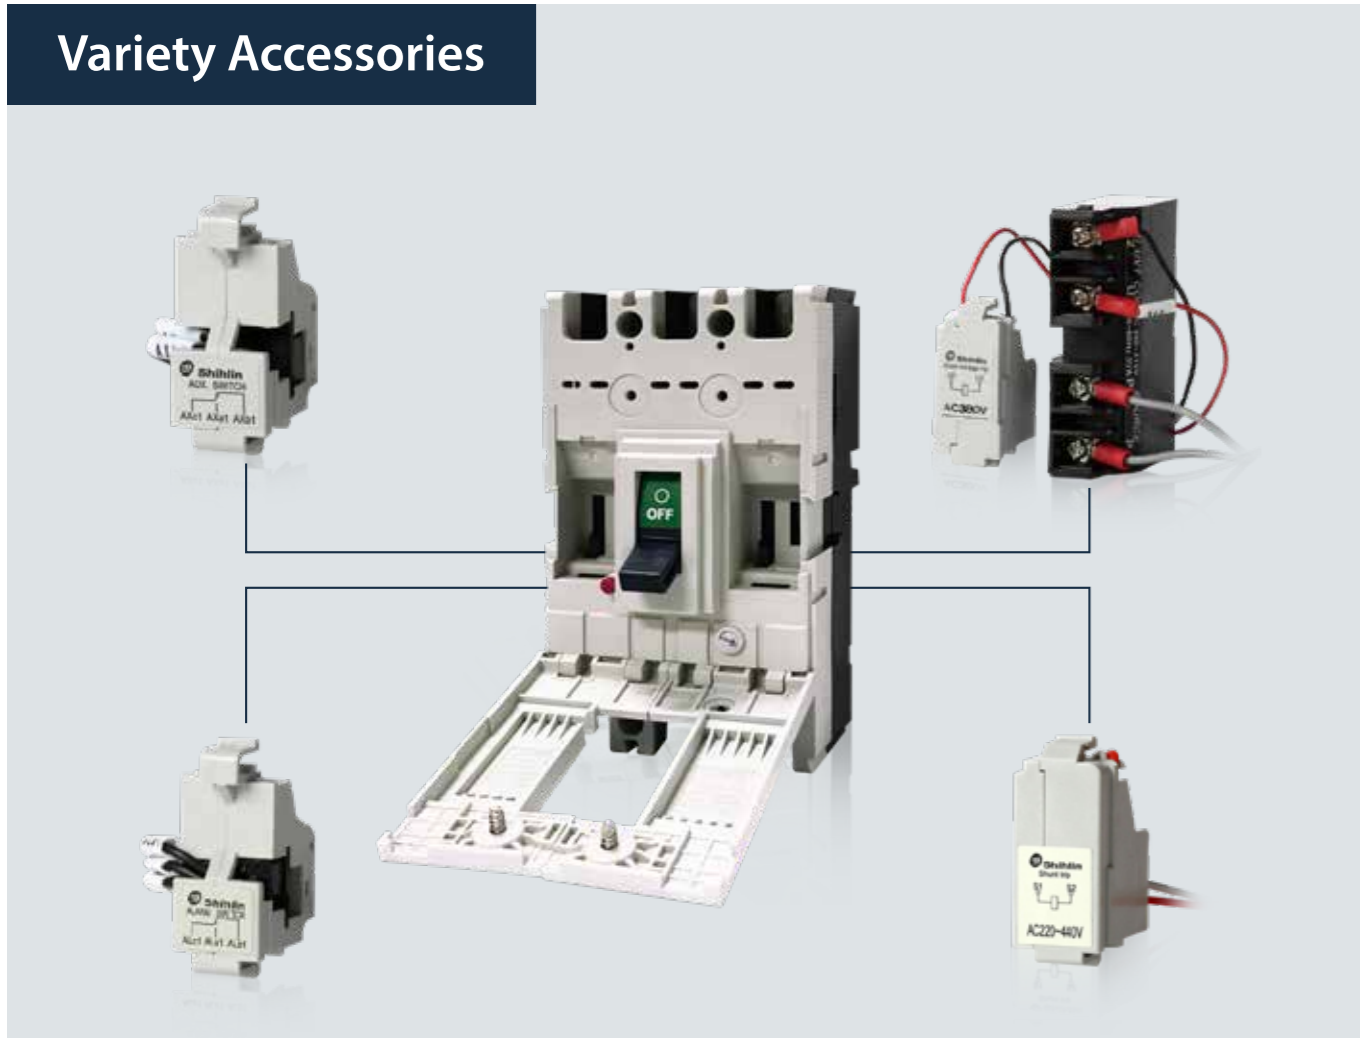

Item	Specification
AL	AC 250V 10A, DC 125V 0.6A
AX	AC 250V 10A, DC 125V 0.6A
SHT	AC 110V 50/60Hz, AC 220V 50/60Hz, AC 380V 50/60Hz AC 440V 50/60Hz, DC 24V, DC 48V
UVT	AC 200~240V 50/60Hz, AC 380~415V 50/60Hz, AC 440~460V 50/60Hz

Motor Operation Device


Model	Pole	Applicable MCCB	Specification		
			Rated Voltage	Current	Power
MT-125N	3P/4P	BMA125-STA/LTA/HTA	AC230V/DC220V AC/DC110V DC24V	≤0.5A	14W
MT-250N	3P/4P	BMA160-STA/LTA/HTA BMA250-STA/LTA/HTA			
MT-400N	3P/4P	BMA400-LTA/HTA/RTA BMA630s-STA/LTA/HTA/RTA	AC230V/DC220V AC/DC110V DC24V	≤2.0A	35W
MT-800N	3P/4P	BMA630-HTA/RTA/HED/RED BMA800-HTA/RTA/HED/RED			

Rotary Handle

Model	Pole	Applicable MCCB
EH-125T	3P/4P	BMA125-STA/LTA/HTA
EH-250 T	3P/4P	BMA160-STA/LTA/HTA BMA250-STA/LTA/HTA
EH-400N	3P/4P	BMA400-LTA/HTA/RTA BMA630s-STA/LTA/HTA/RTA
EH-800N	3P/4P	BMA630-HTA/RTA/HED/RED BMA800-HTA/RTA/HED/RED

Extend Rotary Handle

Model	Pole	Applicable MCCB
MA-125T	3P/4P	BMA125-STA/LTA/HTA
MA-250N	3P/4P	BMA160-STA/LTA/HTA BMA250-STA/LTA/HTA
MA-400N	3P/4P	BMA400-LTA/HTA/RTA BMA630s-STA/LTA/HTA/RTA
MA-800N	3P/4P	BMA630-HTA/RTA/HED/RED BMA800-HTA/RTA/HED/RED

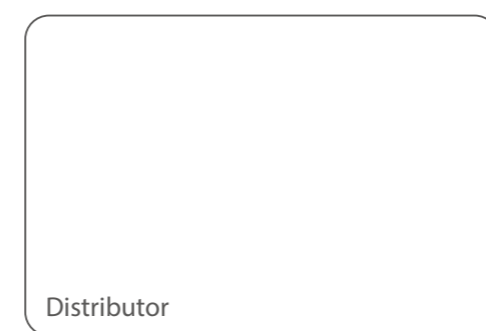

Distributor

B210326E.MCCB-KEMA.3F.3000P

Breaker & switchgears overseas sales dept.

3F, No.9, Sec. 1, Chang-an E. Rd., Zhongshan Dist., Taipei City 10441, Taiwan
T. +886-2-2541-9822 F. +886-2-2581-2665
e-mail. b.export@seec.com.tw
<http://circuit-breaker.seec.com.tw>

Headquarters

16F, No.88, Sec. 6, Zhongshan N. Rd., Shilin Dist., Taipei City 11155, Taiwan
T. +886-2-2834-2662 F. +886-2-2836-6187
<http://www.seec.com.tw>



Molded Case Circuit Breaker

www.seec.com.tw

Adjustable Series

Flexible & Reliable Choice for Power Distribution Protection




Breaker & switchgears overseas Sales dept.
<http://circuit-breaker.seec.com.tw>

Headquarters
<http://www.seec.com.tw>

Meet your need for medium size electrical distribution of commercial & industrial project


Ics=100%Icu

Ideal Breaking Capacity Coordination in general application

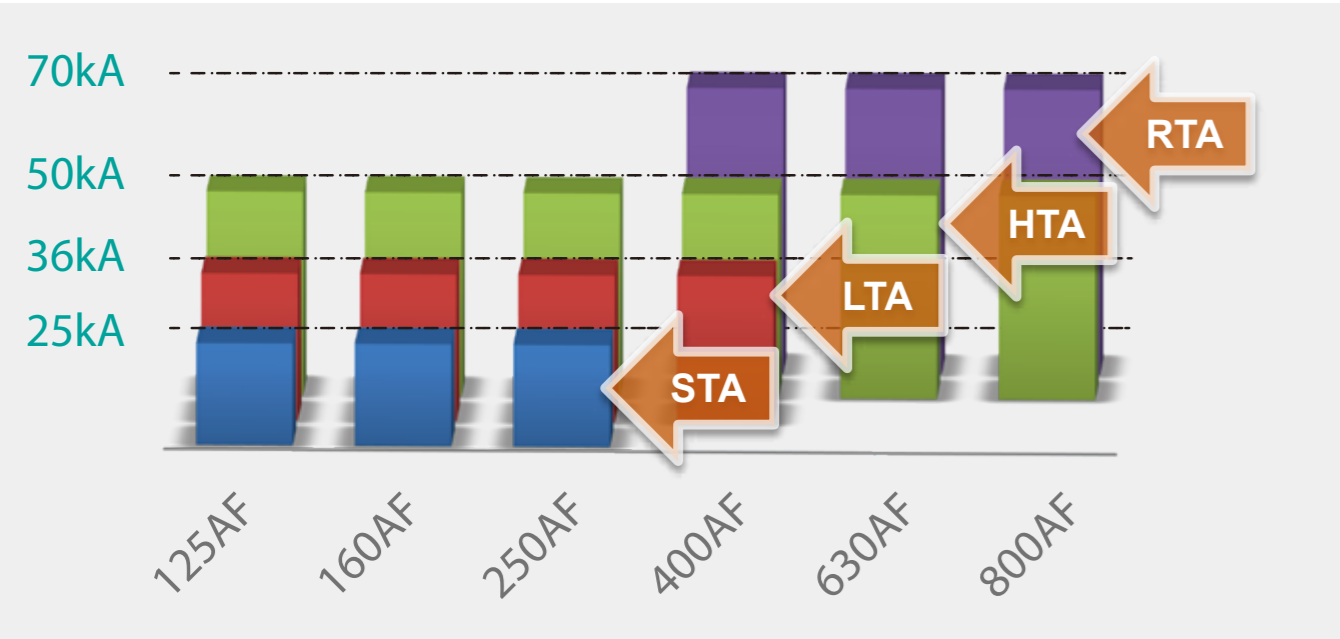


Adjustable Ir

Thermal Magnetic

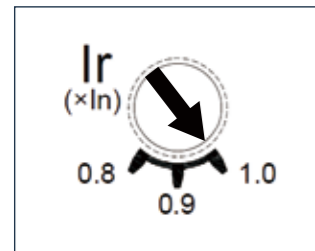

Electronic

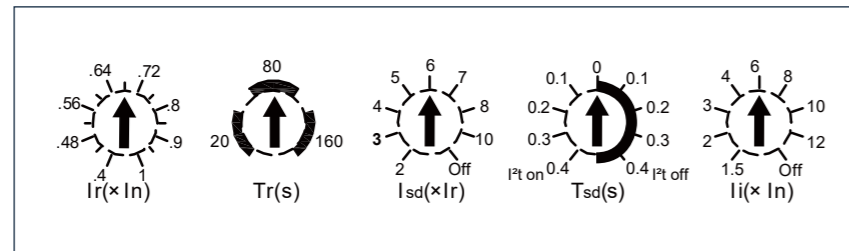

Frame Size	Type	Ir Range	Trip Unit
125, 160, 250AF	STA, LTA, HTA	0.8 - 0.9 - 1.0	Thermal Magnetic
400AF	LTA, HTA, RTA		
630AF	STA, LTA, HTA, RTA		
800AF	HTA, RTA		
630, 800AF	HED, RED	0.4-0.48-0.56-0.64-0.72-0.8-0.9-1.0	Electronic Magnetic

Series	BMA125			BMA160			BMA250			BMA400			BMA630s				BMA630		BMA800		BMA630		BMA800		
Frame Size	125AF			160AF			250AF			400AF			630AF				630AF		800AF		630AF		800AF		
Model	STA	LTA	HTA	STA	LTA	HTA	STA	LTA	HTA	LTA	HTA	RTA	STA	LTA	HTA	RTA	HTA	RTA	HTA	RTA	HED	RED	HED	RED	
Pole	2P / 3P / 4P			3P / 4P			3P / 4P			3P / 4P			3P / 4P				3P / 4P		3P / 4P		3P / 4P		3P / 4P		
Frequency (Hz)	50 / 60			50 / 60			50 / 60			50 / 60			50 / 60				50 / 60		50 / 60		50 / 60		50 / 60		
Rated Current, In	15,16,20,25,30,32,40,50,60,63,75,80,100,125A			40,50,60,63,70,75,80,100,125,140,150,160A			175,200,225,250A			250,300,350,400A			400,500,600,630A				500,600,630A		700,800A		630A		800A		
Ue	AC 690 V			AC 690 V			AC 690 V			AC 690 V			AC 690 V				AC 690 V		AC 690 V		AC 690 V		AC 690 V		
Uimp	8kV			8kV			8kV			8kV			8kV				8kV		8kV		8kV		8kV		
Ui	AC 800 V			AC 800 V			AC 800 V			AC 800 V			AC 1000 V				AC 1000 V		AC 1000 V		AC 1000 V		AC 1000 V		
Breaking Capacity, Icu (AC)	690V	8 kA	8 kA	10 kA	8 kA	8 kA	10 kA	8 kA	8 kA	10 kA	8 kA	10 kA	15 kA	10 kA	10 kA	10 kA	15 kA	10 kA	15 kA	10 kA	15 kA	10 kA	15 kA	10 kA	15 kA
	415V	25 kA	36 kA	50 kA	25 kA	36 kA	50 kA	25 kA	36 kA	50 kA	36 kA	50 kA	70 kA	25 kA	36 kA	50 kA	70 kA	50 kA	70 kA	50 kA	70 kA	50 kA	70 kA	50 kA	70 kA
	380V	25 kA	36 kA	50 kA	25 kA	36 kA	50 kA	25 kA	36 kA	50 kA	36 kA	50 kA	70 kA	25 kA	36 kA	50 kA	70 kA	50 kA	70 kA	50 kA	70 kA	50 kA	70 kA	50 kA	70 kA
	240V	50 kA	85 kA	100 kA	85 kA	85 kA	100 kA	85 kA	85 kA	100 kA	70 kA	85 kA	100 kA	50 kA	65 kA	85 kA	100 kA	85 kA	100 kA	85 kA	100 kA	85 kA	100 kA	85 kA	100 kA
	220V	50 kA	85 kA	100 kA	85 kA	85 kA	100 kA	85 kA	85 kA	100 kA	70 kA	85 kA	100 kA	50 kA	65 kA	85 kA	100 kA	85 kA	100 kA	85 kA	100 kA	85 kA	100 kA	85 kA	100 kA
Ics (%Icu)	100%																								
Trip Unit	Adjustable Thermal, Fixed Magnetic															Adjustable Thermal, Adjustable Magnetic				Electronic					

Ue 690Vac Uimp 8kV ↑ Ui 800Vac ↑

Ir. Adjustable IEC60947-2

Technical Data

